


The ILLUMRA Wireless Door/Window Sensor maximizes the energy savings of heating and air conditioning systems by providing wireless status of windows and/or doors. The sensor uses a magnet contact switch that is powered by a solar cell and communicates with a wide variety of ILLUMRA products.

Energy waste can be reduced by 20 to 60 percent by disabling blowers and/or adjusting temperature setpoints in HVAC systems when windows and doors are left open. The wireless Door/Window Sensor is a key component to reducing energy waste in hotel, condominium and dormitory buildings.

Using a simple 'peel and stick' process, the Wireless Door/Window Sensor makes it quick and easy to provide energy savings.

Applications

- HVAC interlock – save energy when doors/windows are left open
- Hotel occupancy – Used with motion sensor to determine occupancy
- Commercial Coolers – notify when doors are left open
- Security – Alarm when windows or doors are opened

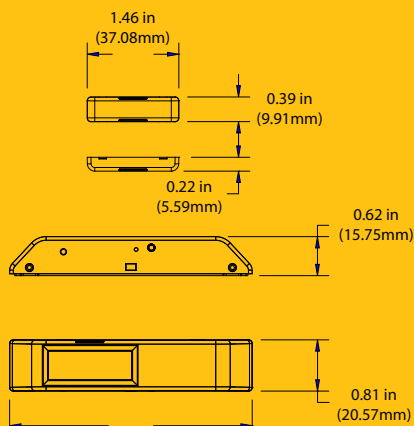

ILLUMRA
Lindon, UT 84042

T: (801) 349-1200

Sales@ILLUMRA.com
Info@ILLUMRA.com
www.ILLUMRA.com


Features

- No Batteries – No Maintenance
- Solar powered – operates several days in darkness when fully charged
- Install in minutes
- Security screws included for tamper resistance
- Eliminate the need to pull wires to sensors



	E9T-MDCCP
Range	15-60 feet (5-20m) typical
Frequency	902 MHz
Power Supply	Integrated Solar Cell
Sensor Type	Magnetic Reed Switch (7mm minimum gap)
Start-up time w/ empty storage	~2.5 minutes @ 400 lux, 25°C
Operating time in darkness	5 days when fully charged
EEP (EnOcean Equipment Profile)	D5-00-01
Operating Temperature	-4° to +140°F (-20° to +60°C)
Storage Temperature	-40° to +140°F (-40° to +60°C)
Dimensions (enclosure)	3.9 x 0.6 x 0.8 inches 98 x 15.8 x 20.6 mm
Radio Certification	FCC (United States), IC (Canada)

Network Diagram

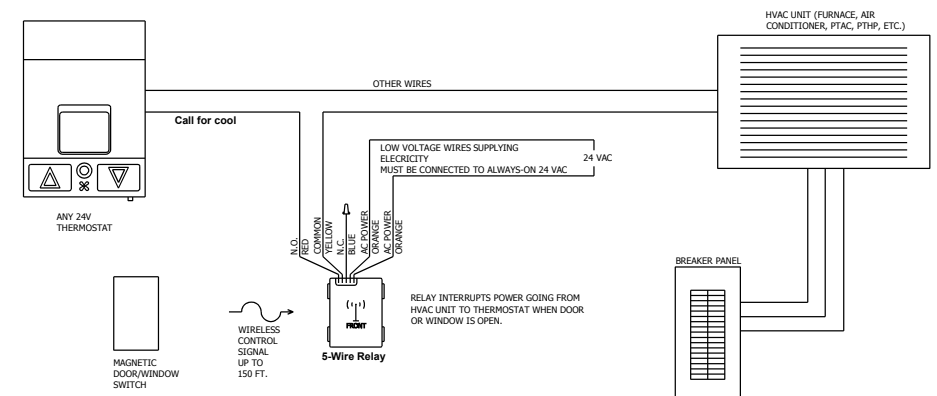

This device or certain aspects thereof is protected by at least one U.S. or international patent or has at least one such patent application pending.