

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [2093111115](#)
Status: **Active**
Overview: [Mirror Mezz and Mirror Mezz Pro Connectors](#)
Description: Mirror Mezz Hermaphroditic Connector, 2.50mm Connector Height, BGA-Attach Mounting, 15 Pair, 11 Row, 688 Circuits, 0.76µm Gold (Au) Plating

Documents:

3D Model	Application Specification 2028280001-AS-000 (PDF)
2D Drawing (DXF)	Application Specification 2028289005PS-001 (PDF)
2D Drawing DXF (PDF)	Application Specification 2093110001-AS-000 (PDF)
Drawing (PDF)	Packaging Specification 2093118500-000 (PDF)
3D Model (PDF)	Datasheet (PDF)
Product Specification 2028280001-000 (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification


CSA	LR19980
UL	E29179

General

Product Family	PCB Headers
Series	209311
Application	Board-to-Board
Overview	Mirror Mezz and Mirror Mezz Pro Connectors
Product Name	Mirror Mezz
Taxonomy	Board-to-Board Connectors
UPC	191130509140

Physical

Breakaway	No
Circuits (Loaded)	688
Circuits (maximum)	688
Color - Resin	Black
Durability (mating cycles max)	100
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	Yes
Keying to Mating Part	None
Lock to Mating Part	No
Mated Height	5.00mm
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	BGA Solder
Material - Resin	High Temperature Thermoplastic
Net Weight	5.360/g
Number of Rows	11
Orientation	Vertical
PCB Locator	Yes
PCB Retention	Yes
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface	1.50mm, 4.00mm
Plating min - Mating	0.762µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Yes
Stackable	Yes
Temperature Range - Operating	-55° to +105°C

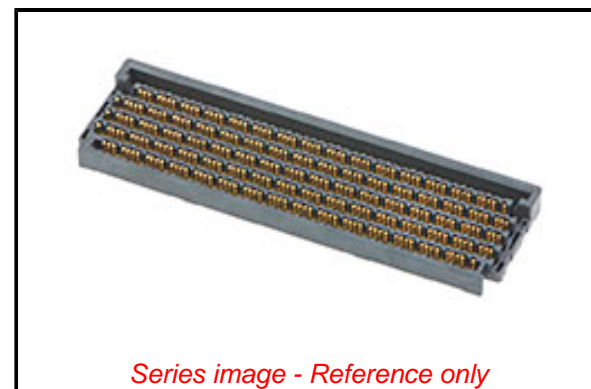

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2022)4187-DC (10
June 2022)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[209311 Series](#)

Mates With

[Mirror Mezzanine Hermaphroditic Connector
2093111115](#)

Termination Interface: Style

Surface Mount

Electrical

Current - Maximum per Contact

0.75A (1 Oz Cu Trace), 1.0A (1.5 Oz Cu Trace), 1.2A (2 Oz Cu Trace)

Voltage - Maximum

30V AC (RMS)/DC

Solder Process Data

Duration at Max. Process Temperature (seconds)

020

Lead-free Process Capability

REFLOW

Max. Cycles at Max. Process Temperature

001

Process Temperature max. C

260

Material Info

Reference - Drawing Numbers

Application Specification

2028280001-AS-000, 2028289005PS-001,
2093110001-AS-000

Electrical Model Document

2093111115EE-000

Packaging Specification

2093118500-000

Product Specification

2028280001-000

S-Parameter Model

2093111115SP-000

Sales Drawing

2093111115-SD-000

This document was generated on 11/22/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION