



# Component Specification

**C00610**

**Sub-Miniature Sockets  
October 2021**

<b>SECTION</b>	<b>TITLE</b>	<b>PAGE</b>
1	Description of Connector and Intended Application	2
2	Ratings	2
Appendix 1	Gauges	4

## 1. DESCRIPTION OF CONNECTOR AND INTENDED APPLICATION

The sub-miniature sockets are designed to allow I.C. devices to be mounted onto printed circuit boards, giving virtually zero above-board profile. The added advantage is of allowing tracks to be taken between the sockets, spaced on 2.54mm pitch centres. The socket is a clearance fit into a Ø1mm hole, and has a closed body design to eliminate solder wicking.

The socket consists of an outer brass shell, with tapered entry for I.C. leads, and an inner spring contact. This contact is manufactured from beryllium copper with four contact fingers. Both shell and spring contact have a choice of gold or tin finish with nickel undercoat.

This high reliability socket is designed to meet severe environmental conditions of shock, vibration, bump, etc. It is intended for applications where space is limited.

## 2. RATINGS

### 2.1. Electrical Characteristics

Current Rating (in isolation):	
25°C ambient.....	2.0A max
85°C ambient.....	1.75A max
Contact Resistance (maximum):	
Initial .....	15mΩ
After conditioning.....	25mΩ

### 2.2. Environmental Characteristics

Environmental classification.....	55/125/56 at 95% RH
Operating Temperature Range.....	-55°C to +125°C
Low Air Pressure Severity.....	300 mbar
Vibration Severity.....	10Hz to 2,000Hz at 0.75mm, 98m/s <sup>2</sup> (10G), duration 6 hours
Bump Severity.....	390m/s <sup>2</sup> (40G), 4000 bumps
Shock Severity.....	981m/s <sup>2</sup> (100G) for 6ms

### 2.3. Mechanical Characteristics

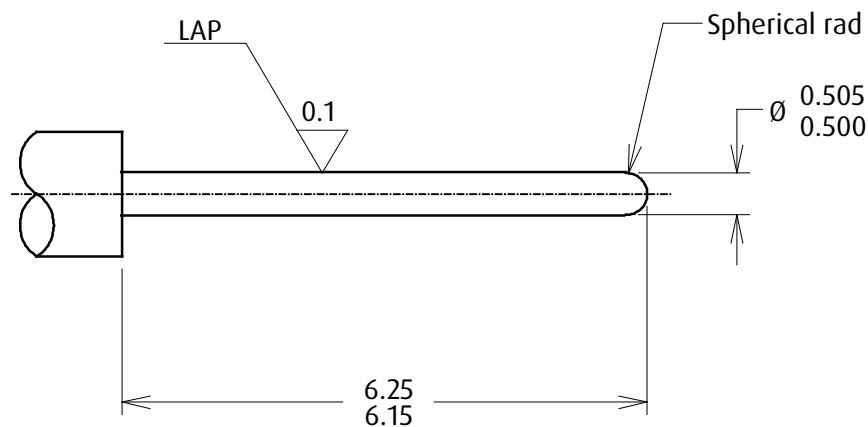
Durability:	
Gold on contact area.....	500 mating operations
Tin on contact area .....	50 mating operations
Clip retention in body .....	10N min
<i>Minimum retention force may be 10N from a sample of 10 sockets, providing the average of the samples is 22N.</i>	
Insertion Force:	
Initial .....	6.0N max
After Conditioning .....	2.0N min
Withdrawal Force:	
Initial .....	1.5N max
After Conditioning .....	0.5N min

**APPENDICES NOTES:**

1. Third angle projection is used where projected views are shown.
2. All dimensions are in millimetres.
3. For explanation of dimensions, etc. see BS8888.
4. Unless otherwise stated, all dimensions are maxima.

**APPENDIX 1 – GAUGES****NOTES:**

1. Material = Steel to BS1407 or equivalent.
2. Gauging surfaces to be hardened/ground, 650 HV5 min.
3. These gauges to be used for testing fully assembled components only.
4. Ultimate wear limit 0.005mm is allowable on gauging dimensions.

**A1.1. Insertion and Withdrawal Gauge****A1.2. Holding Gauge (After conditioning)**

Mass =  $50 +0/-1$  gm

