

|   |  |
|---|--|
| GlobTek, Inc.<br>www.globtek.com<br>186 Veterans Drive,<br>Northvale, NJ 07647<br>Tel. (201) 784-1000<br>Fax (201) 784-0111 | Drawing Title: Nema 1-15P, North American (Type A) , Non-polarized, Nickel plated prongs, UL code YP-11 to IEC60320-C7, 2 Prong IEC receptacle, UL Code YC-13, GT Cable #111: 18 / 2 Conductors, 3.5X6.9mm OD, SPT-2, 60 Deg.C, 300V, SOLID/RIBBED, Approvals: , 1830mm, GlobTek Black |
|   | Model No. Power Cord   |
| Part No./Ordering No. 4511116F703A(R)   | Rev G1   |

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

In Addition to GlobTek Inc.'s renewed ISO9001:2008 - Quality Management System Certification, GlobTek Inc. is now certified to:

ISO13485:2003 - Medical Devices Quality Management System Certification  
ISO14001:2004 - Environmental Management System Certification

ISO Certificates are available online at <https://www.globtek.com/iso-certificates/>  
Prop 65 Statement:<https://en.globtek.com/prop-65-statement.pdf>

The acceptance of this specification and use of the product described in this document indicates the acceptance and binding of the customer to Globtek TERMS AND CONDITIONS (attached to the end of this document), which supersede all other agreements, terms, and conditions (<https://en.globtek.com/terms-and-conditions/>).

The purchaser of this product (Customer) agrees that it is their sole responsibility to determine suitability/fitness of the product described in this specification for their application and to take precautions for protection against any hazards attendant to the handling and use of the product.

**Footnote:**

GlobTek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult applicable UL, CSA or EN standards for proper installation instruction.

**Limitation of Use:**

GlobTek products are intended for use with commercial, medical, and/or industrial equipment only. GlobTek product are not authorized for use as mission critical components in life support hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of GlobTek Inc.  
Contents of this document are subject to change without prior notice.

**Customer Approval of Specification:**

Please approve, sign and send back to GlobTek so we can complete order processing.  
A delay in receipt of this form will delay delivery schedule.

|                                       |  |
|---------------------------------------|--|
| Company Name: _____                   | Customer P/N: _____                        |
| Quote Number: _____                   | Date: _____                                |
| Authorized Representative Name: _____ | Authorized Representative Signature: _____ |

|   |  |        |
|---|--|--------|
| GlobTek, Inc.<br>www.globtek.com<br>186 Veterans Drive,<br>Northvale, NJ 07647<br>Tel. (201) 784-1000<br>Fax (201) 784-0111 | Drawing Title: Nema 1-15P, North American (Type A) , Non-polarized, Nickel plated prongs, UL code YP-11 to IEC60320-C7, 2 Prong IEC receptacle, UL Code YC-13, GT Cable #111: 18 / 2 Conductors, 3.5X6.9mm OD, SPT-2, 60 Deg.C, 300V, SOLID/RIBBED, Approvals: , 1830mm, GlobTek Black |        |
|   | Model No. Power Cord   |        |
|   | Part No./Ordering No. 4511116F703A(R)  | Rev G1 |

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

## REVISION HISTORY

| REV | DESCRIPTION  | SUB   | DATE       | APPROVED |
|-----|--|-------|------------|----------|
| G1  | Update drawing   | bsiep | 05/09/2022 | QA       |
| G   | Update spec to SF format, update cable drawing         | QA    | 02/24/2020 | QA       |
| F   | UPDATE RATING FROM 10A/125V TO 7A/125V, RFS. 27217, BS | jwarn | 11/27/2019 | QA       |
| E   | CORRECT LENGTH TOLERANCE                               | jsund | 04/08/2011 | QA       |

Cordset Information:

CordsetColor:GlobTek Black


Cord Length (mm):1830

### NOTES:

Cable flammability rating: VW-1, FT2. Cable conductors are raw copper and non-plated/non-coated.

|   |  |        |
|---|--|--------|
| GlobTek, Inc.<br>www.globtek.com<br>186 Veterans Drive,<br>Northvale, NJ 07647<br>Tel. (201) 784-1000<br>Fax (201) 784-0111 | Drawing Title: Nema 1-15P, North American (Type A) , Non-polarized, Nickel plated prongs, UL code YP-11 to IEC60320-C7, 2 Prong IEC receptacle, UL Code YC-13, GT Cable #111: 18 / 2 Conductors, 3.5X6.9mm OD, SPT-2, 60 Deg.C, 300V, SOLID/RIBBED, Approvals: , 1830mm, GlobTek Black |        |
|   | Model No. Power Cord   | Rev G1 |
| Part No./Ordering No. 4511116F703A(R)   |  |        |


CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

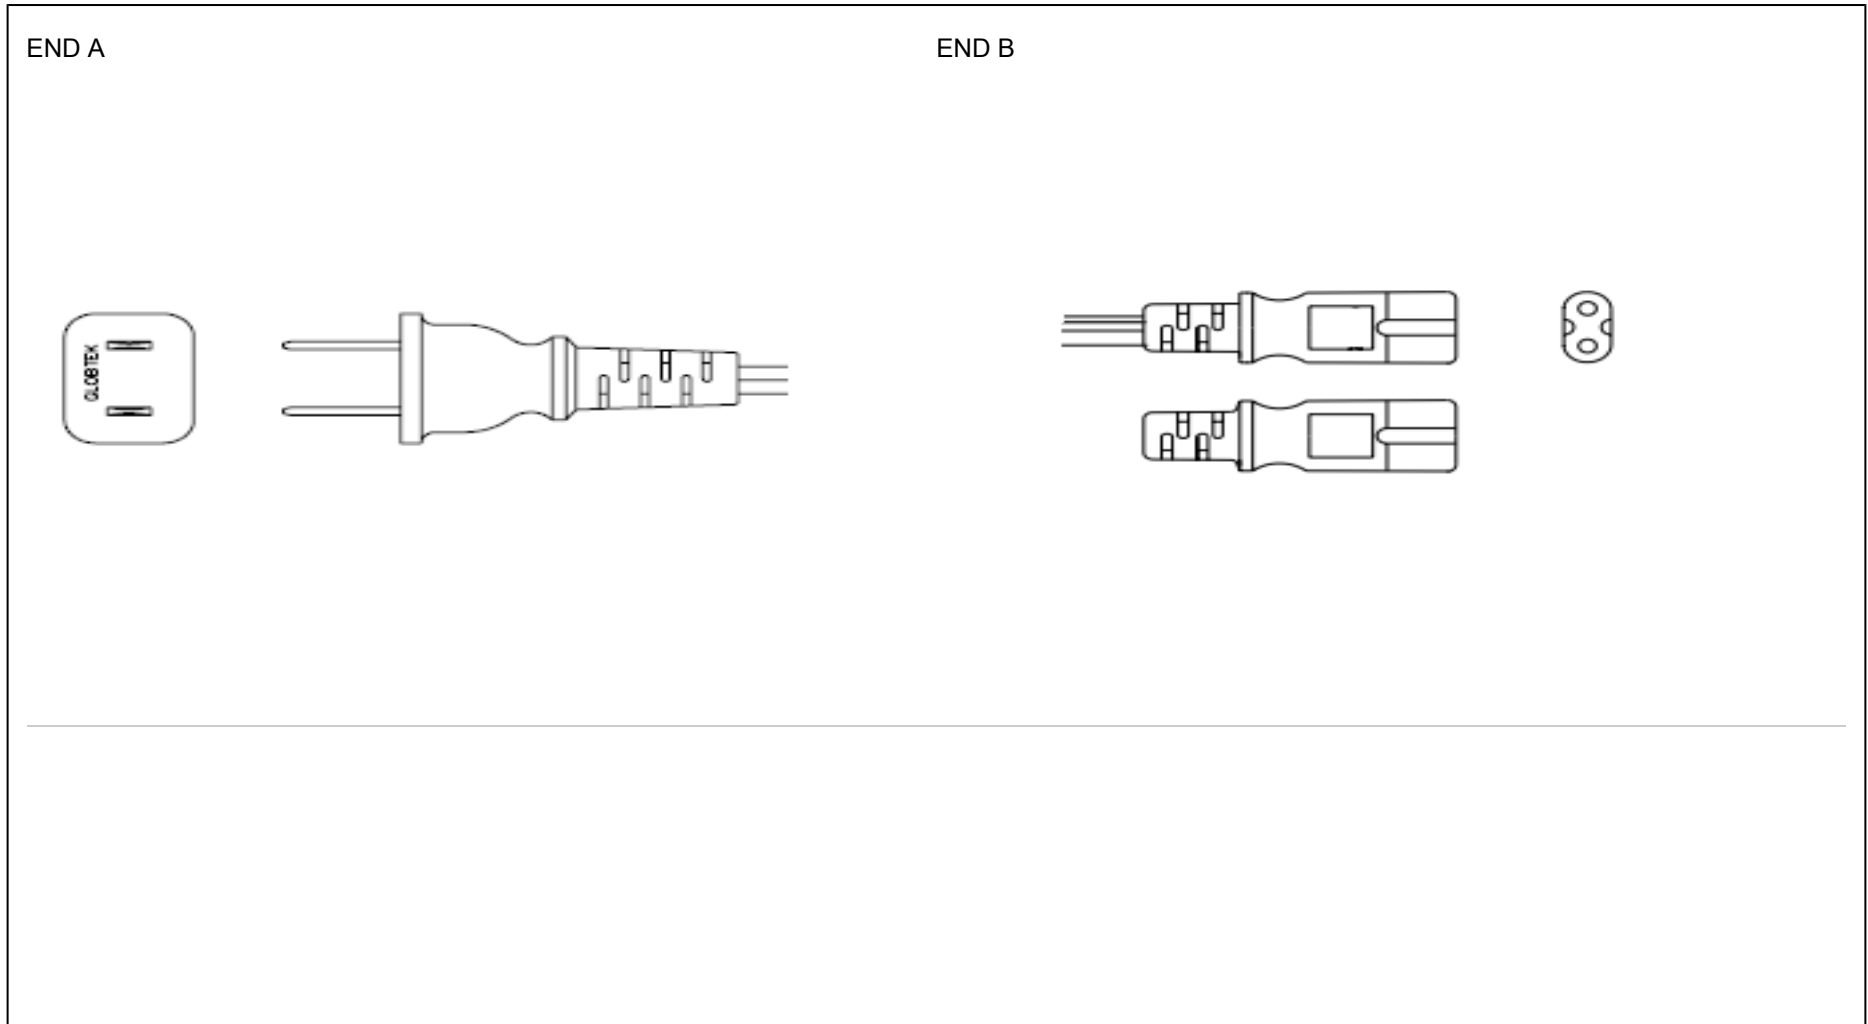

|   |  |
|---|--|
| GlobTek, Inc.<br>www.globtek.com<br>186 Veterans Drive,<br>Northvale, NJ 07647<br>Tel. (201) 784-1000<br>Fax (201) 784-0111 | Drawing Title: Nema 1-15P, North American (Type A) , Non-polarized, Nickel plated prongs, UL code YP-11 to IEC60320-C7, 2 Prong IEC receptacle, UL Code YC-13, GT Cable #111: 18 / 2 Conductors, 3.5X6.9mm OD, SPT-2, 60 Deg.C, 300V, SOLID/RIBBED, Approvals: , 1830mm, GlobTek Black |
|   | Model No. Power Cord   |
| Part No./Ordering No. 4511116F703A(R)   | Rev G1   |

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

CABLE IMAGE

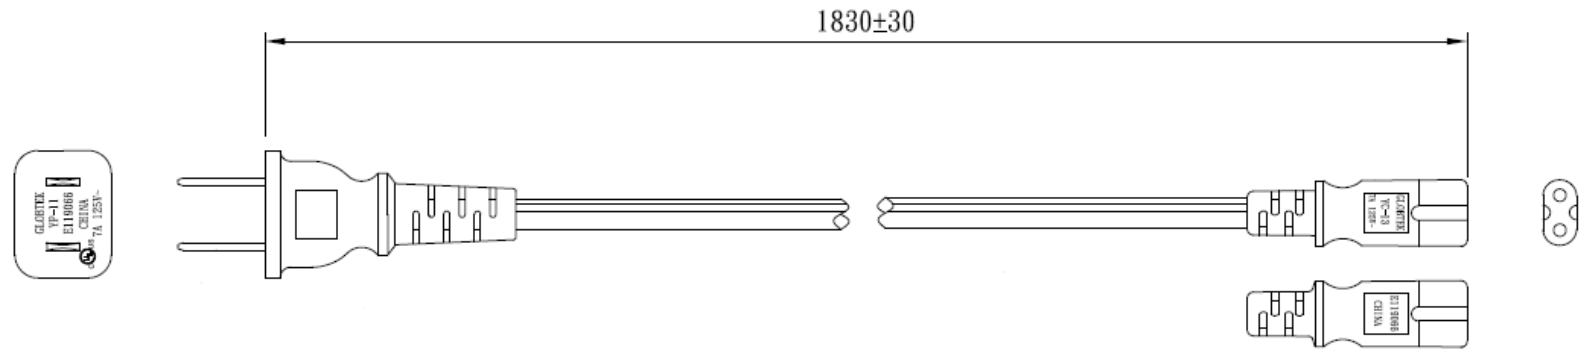

PROPRIETARY INFORMATION


PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2012 - 2022

|   |  |        |
|---|--|--------|
| GlobTek, Inc.<br>www.globtek.com<br>186 Veterans Drive,<br>Northvale, NJ 07647<br>Tel. (201) 784-1000<br>Fax (201) 784-0111 | Drawing Title: Nema 1-15P, North American (Type A) , Non-polarized, Nickel plated prongs, UL code YP-11 to IEC60320-C7, 2 Prong IEC receptacle, UL Code YC-13, GT Cable #111: 18 / 2 Conductors, 3.5X6.9mm OD, SPT-2, 60 Deg.C, 300V, SOLID/RIBBED, Approvals: , 1830mm, GlobTek Black |        |
|   | Model No. Power Cord   |        |
|   | Part No./Ordering No. 4511116F703A(R)  | Rev G1 |

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

|   |   |   |
|---|---|---|
| End A<br>Code:451<br>Description:Nema 1-15P, North American (Type A) , Non-polarized, Nickel plated prongs, UL code YP-11<br>Rating (V):125<br>Rating (A):15.0<br>Gender:Male<br>Overmolded:Yes | Cable<br>Code:111<br>Description:GT Cable #111: 18 / 2 Conductors, 3.5X6.9mm OD, SPT-2, 60 Deg.C, 300V, SOLID/RIBBED, Approvals:<br>Color:GlobTek Black<br>Wire Gauge(AWG):18<br>Cond:2<br>Type:SPT-2<br>Temperature:60° C<br>Amps:10<br>Volts:300<br>OD:3.5X6.9<br>ConductorsColors:SOLID/RIBBED | End B<br>Code:703A<br>Description:IEC60320-C7, 2 Prong IEC receptacle, UL Code YC-13<br>Rating (V):125<br>Rating (A):7.0<br>Gender:Female<br>Overmolded:Yes |
|---|---|---|

Overall cable rating:7A /125V AC

| Plug Approvals   | Cable Approvals   | Connector Approvals   |
|--|---|---|
|  <p>Note: North American power cords are certified as assemblies of UL rated parts, so, the combination of UL certified plugs, connectors, and cables total up to a UL approved cordset or cable assembly</p> <p><a href="#">LINK TO CERTs</a><br/> <a href="#">Link to live Power Cords listing @ UL</a><br/> <a href="#">Link to live Flexible Cord listing @ UL</a></p> | <p>E119066 (UL/CUL file number, no logo)</p> <p>UL Note: North American power cords are certified as CSA assemblies of UL rated parts, so, the combination of UL certified plugs, connectors, and cables total up to a UL approved cordset or cable assembly</p> <p><a href="#">LINK TO CERTs</a><br/> <a href="#">Link to live Power Cords listing @ UL</a><br/> <a href="#">Link to live Flexible Cord listing @ UL</a></p> | <p>E119066 (UL/CUL file number, no logo)</p> <p>UL-CUL Note: North American power cords are certified as assemblies of UL rated parts, so, the combination of UL certified plugs, connectors, and cables total up to a UL approved cordset or cable assembly</p> <p><a href="#">LINK TO CERTs</a><br/> <a href="#">Link to live Power Cords listing @ UL</a><br/> <a href="#">Link to live Flexible Cord listing @ UL</a></p> |

AGENCY ONLINE DOCUMENTS <http://en.globtek.com/cordsets/>

|   |  |        |
|---|--|--------|
| GlobTek, Inc.<br>www.globtek.com<br>186 Veterans Drive,<br>Northvale, NJ 07647<br>Tel. (201) 784-1000<br>Fax (201) 784-0111 | Drawing Title: Nema 1-15P, North American (Type A) , Non-polarized, Nickel plated prongs, UL code YP-11 to IEC60320-C7, 2 Prong IEC receptacle, UL Code YC-13, GT Cable #111: 18 / 2 Conductors, 3.5X6.9mm OD, SPT-2, 60 Deg.C, 300V, SOLID/RIBBED, Approvals: , 1830mm, GlobTek Black |        |
|   | Model No. Power Cord   |        |
|   | Part No./Ordering No. 4511116F703A(R)  | Rev G1 |


CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

|   |   |
|---|---|
| RoHS/RoHS3 Declaration  | <a href="https://www.globtek.com/pdf/rohs_cert/01t30000002p7F2AAI">https://www.globtek.com/pdf/rohs_cert/01t30000002p7F2AAI</a>   |
| REACH Declaration   | <a href="https://www.globtek.com/pdf/iso_certificates/REACH.pdf">https://www.globtek.com/pdf/iso_certificates/REACH.pdf</a>   |
| Conflict Minerals Declaration   | <a href="https://www.globtek.com/pdf/conflict-minerals.pdf">https://www.globtek.com/pdf/conflict-minerals.pdf</a>   |
| Prop 65 Statement   | <a href="https://en.globtek.com/prop-65-statement.pdf">https://en.globtek.com/prop-65-statement.pdf</a>   |
| CE.UKCA.Cord  | <a href="https://globtek.secure.force.com/spec/ec_decl_product_model_family_incl_cord?id=01t30000002p7F2">https://globtek.secure.force.com/spec/ec_decl_product_model_family_incl_cord?id=01t30000002p7F2</a> |
| IPXY rating is based on 3rd party testing and customers should check suitability and test system level IPXY rating before ordering. |   |

|   |  |        |
|---|--|--------|
| GlobTek, Inc.<br>www.globtek.com<br>186 Veterans Drive,<br>Northvale, NJ 07647<br>Tel. (201) 784-1000<br>Fax (201) 784-0111 | Drawing Title: Nema 1-15P, North American (Type A) , Non-polarized, Nickel plated prongs, UL code YP-11 to IEC60320-C7, 2 Prong IEC receptacle, UL Code YC-13, GT Cable #111: 18 / 2 Conductors, 3.5X6.9mm OD, SPT-2, 60 Deg.C, 300V, SOLID/RIBBED, Approvals: , 1830mm, GlobTek Black |        |
|   | Model No. Power Cord   |        |
|   | Part No./Ordering No. 4511116F703A(R)  | Rev G1 |

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

Hanking: 125  
 Description: 125 +/- 25mm  
 Image:

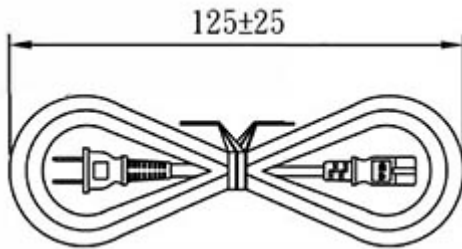

Notes/Modifications/Customizations (notes in this section supersede the values shown in the standard spec):