


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00112	Connector, dc plug, 3.5x1.35xL18.5 mm, brass nickel plated	1	
2	30-00003	Wire, 2C BC, 24 AWG, UL2468, 300V, 80C, 3.6 mm, VW-1, PVC, 76A	1	
3	24-00050	Overmold, PVC	1	black

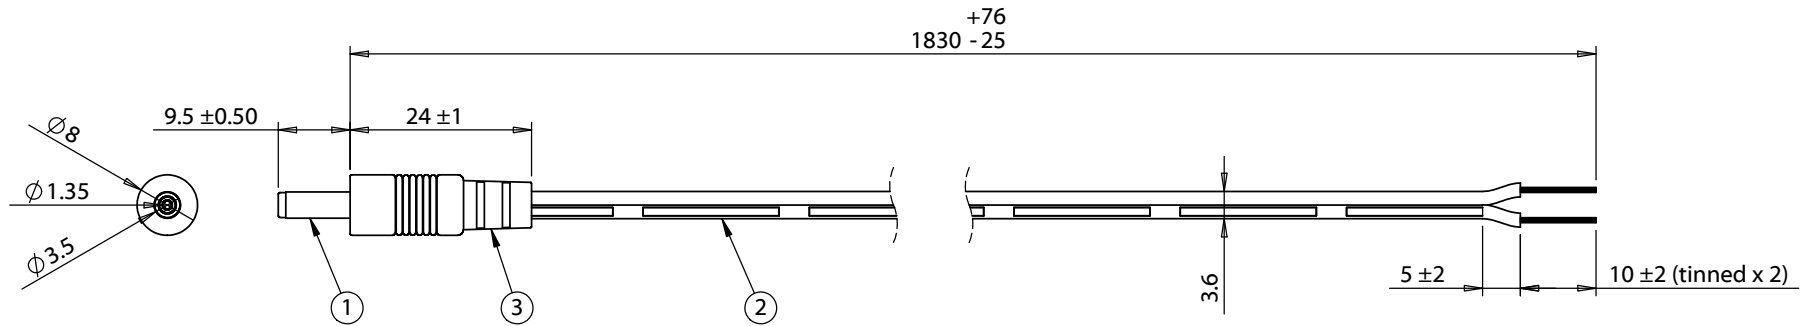

**Notes:**

Hi-Pot test: 600 Vac, 0.5 mA, 1 second

Wiring Diagram	
50-00112	wire color
center	black with stripe
sleeve	black

Revision:	Date:	Description:	Prepared:	Notes:  RoHS compliant  Function test: no open, no short circuit, no intermittent  Description: Cable, 1830 mm, 3.5x1.35x9.5 mm, 50-00112 dc plug to stripped tinned, 24 AWG, 30-00003 wire	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	1/19/2009	Re-issue CUI spec as Tensility	GL <small>Digitally signed by GL Date: 2016.12.09 12:53:10 -08'00'</small>		
A1	1/19/2011	Added overmold dimensions, and updated description	Verified: DN <small>Digitally signed by DN Date: 2016.12.09 14:40:01 -08'00'</small>		
A2	8/31/2011	Updated description, connector, and wire information	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm		
A3	10/9/2013	Changed connector to 50-00112			
A4	12/9/2016	Updated overmold dimension		Size: A	Part number: <b>053-0192R (CA-2193)</b>
				Scale: 1:1	Sheet 1 of 1