


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00370	Connector, dc plug, 5.5x2.1xL25 mm, brass nickel plated	1	
2	30-00007	Wire, 2C BC, 18 AWG, UL2468, 300V, 80C, 4.4 mm, VW-1, PVC, 87A	1	
3	24-00072	Overmold, PVC, black	1	black

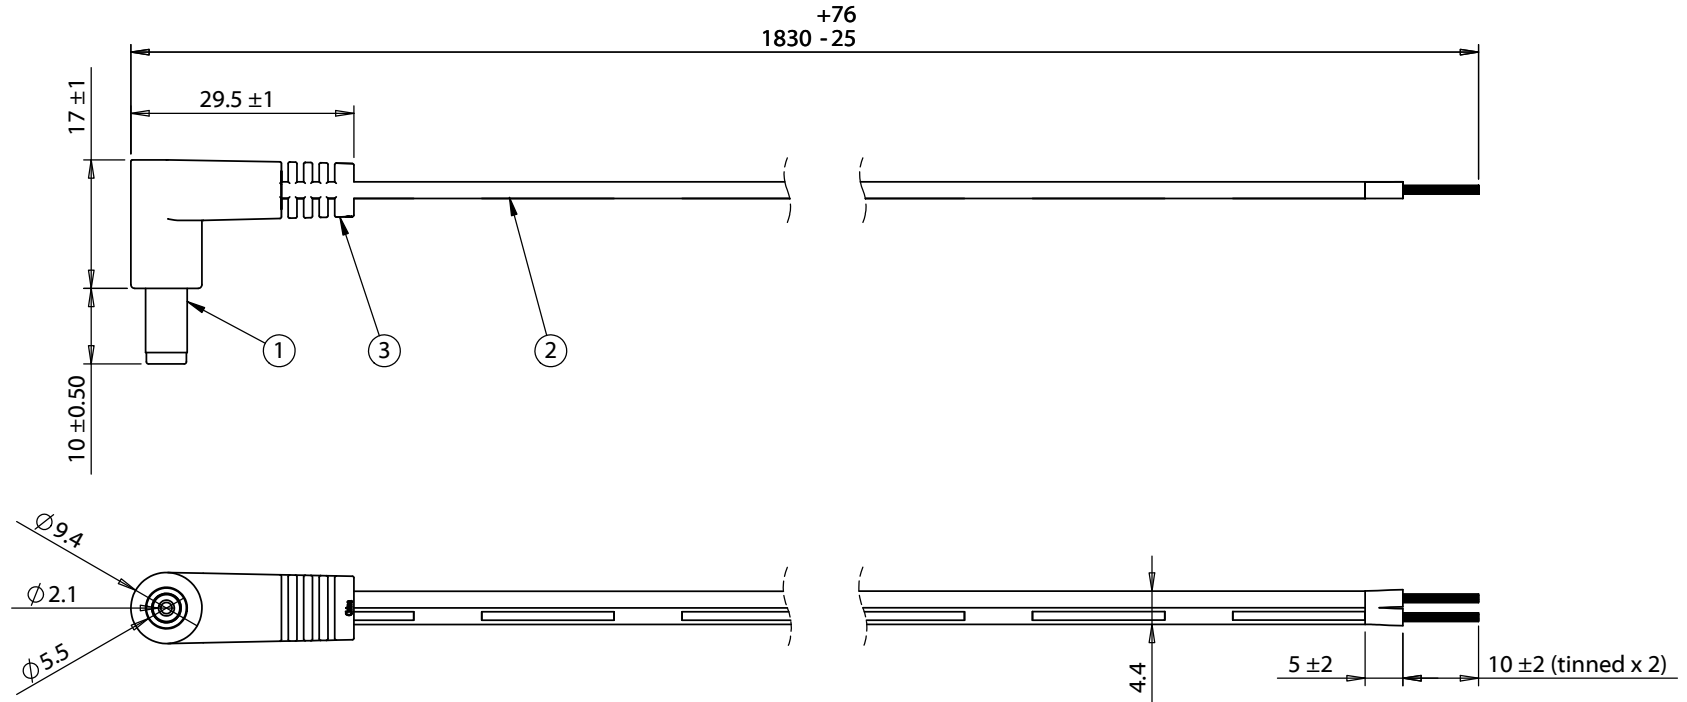

Notes:

Maximum operating temperature: 80°C

Hi-Pot test: 600 Vac, 0.5 mA, 1 second

Wiring Diagram	
50-00370	wire color
center	black with stripe
sleeve	black

Revision:	Date:	Description:	Prepared:	Notes: RoHS compliant Function test: no open, no short circuit, no intermittent Description: Cable, 1830 mm, 5.5x2.1x10 mm, 90° 50-00370 dc plug to stripped tinned, 18 AWG, 30-00007 wire	<div style="text-align: right;"> <h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p> </div>
A1	8/31/2011	Updated description, connector, and wire information	GL 2016.10.12 15:34:00 -07'00'		
A2	12/8/2011	Modified wire diameter	Verified: PS <small>Digitally signed by PS Date: 2016.10.13 11:41:24 -07'00'</small>		
A3	8/29/2013	Updated connector and overmold	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm		
A4	10/8/2013	Added overmold dimensions			
A5	10/12/2016	Corrected typo on operating temp		Size: A	Part number: 053-0190R (CA-2191)
				Scale: 1:1	Sheet 1 of 1