



# TAOGLAS®



# Datasheet

## Terrablast – Lightweight 35mm Patch Antenna

**Part No:**  
GGBTP.35.3.A.40

**Description:**  
GPS/GLONASS/Galileo/BeiDou 35mm Patch Antenna

**Features:**

- GPS L1 / GLONASS L1 / Galileo E1 / BeiDou B1
- Low Profile – 3.5mm Height
- Pin Type Terrablast Patch Antenna
- 10g Ultra-Lightweight Patch
- Peak Gain: 4dBi
- Efficiency: 70%
- Ultra-Impact Resistant
- Low Axial Ratio
- Dimensions: 35x35x3.72mm
- Patent Pending Design
- RoHS & REACH compliant

1.	Introduction	3
2.	Specifications	4
3.	Antenna Characteristics	5
4.	Radiation Patterns	7
5.	Mechanical Drawing	10
6.	Footprint	11
7.	Soldering Recommendations	12
7.	Packaging	13
<hr/>		
	Changelog	14

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.



# 1. Introduction



The Terrablast GGBTP.35.3.A.40 is a revolutionary new antenna developed to meet the unique needs of the UAV and automotive industries. It uses a patent pending antenna technology which results in much lighter weight and withstands impacts. The GGBTP.35.3.A.40 weights just 10g, compared with 15.5g for an equivalent ceramic patch antenna. Its impact-resistant characteristics make it ideal for applications such as automotive e-call systems or UAVs, where the antenna's mechanical and electrical integrity should survive after a crash.

The GGBTP.35.3.A.40 is mounted via a pin and double-sided adhesive. This antenna works well without modifications in most environments but can be tuned and further optimized to different ground-planes and enclosures if required. Custom antenna modifications are subject to possible NRE and minimum order quantity.

Terrablast antennas are not suitable for SMD reflow. The correct method is manual soldering at a soldering temperature of 380°C +/- 20°C for a duration of 3 to 5 seconds. All Terrablast antennas undergo rigorous temperature, vibration and impact tests and exceed the highest ISO16750 standards.

For further information, or support to test and integrate Taoglas Terrablast technology please contact your regional Taoglas facility.


## 2. Specifications

Electrical			
Application Bands	BeiDou B1	GPS L1	GLONASS L1
Operation Frequency (MHz)	1561	1575.42	1602
Efficiency (%)	72.58	69.81	70.27
Peak Gain (dBi)	4.12	4.03	4.33
Average Gain (dBi)	-1.39	-1.56	-1.53
Impedance	50 ohms		
Return Loss (dB)	<- 10 across operating bands		
Polarization	RHCP		
Mechanical			
Patch Dimension (mm)	35 x 35 x 3.5		
Pin Diameter (mm)	0.9		
Pin Length (mm)	2.4		
Weight (g)	9.7		
Environmental			
Storage Temperature	-40°C to 85°C		
Operation Temperature	-40°C to 85°C		
Humidity	Non-Condensing 65°C 95% RH		
Reliability Testing			
Low Temperature	-40°C, 24hrs		
High Temperature	+85°C, 48hrs		
Temperature Cycling	ISO16750 standard, total 240hrs		
Temperature Step	ISO16750 standard, total 300mins		
Free fall	12m		
Shock	10 shocks per axis on 6 faces		
Vibration	ISO16750 standard, 8 hours / axis		
Pin pull force	>5kg-f		
Production life testing (+105°C)	AECQ200 standard, total 1000hrs		


\* Antenna properties were measured with the antenna mounted on 70\*70mm Ground Plane.

### 3. Antenna Characteristics


#### 3.1 Return Loss

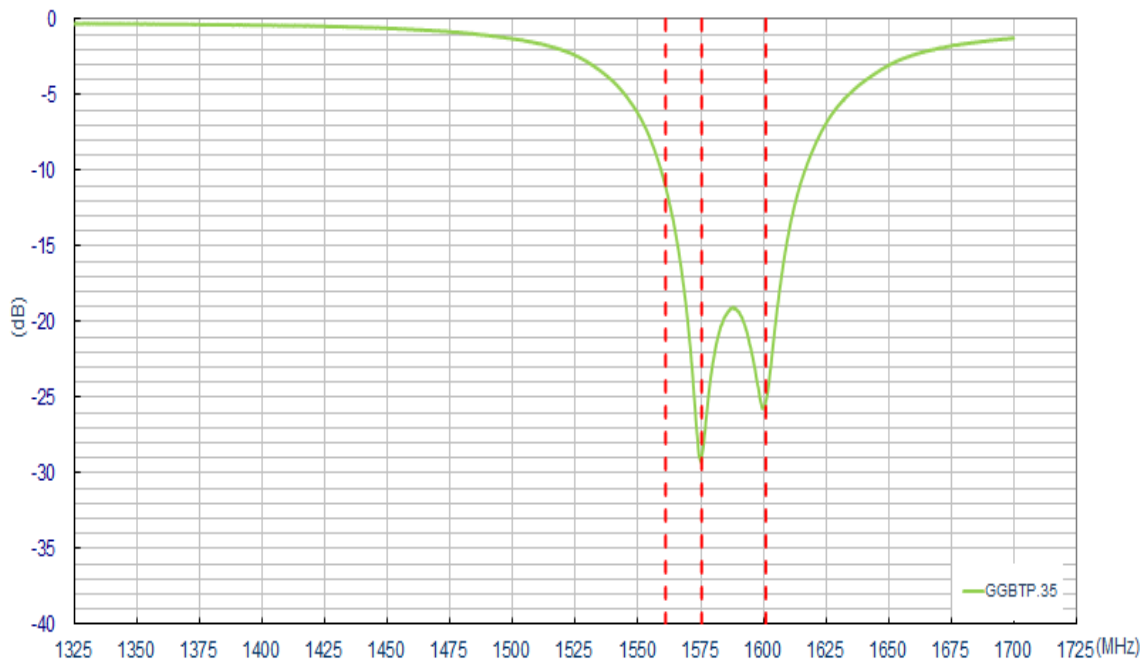


#### 3.2 Efficiency

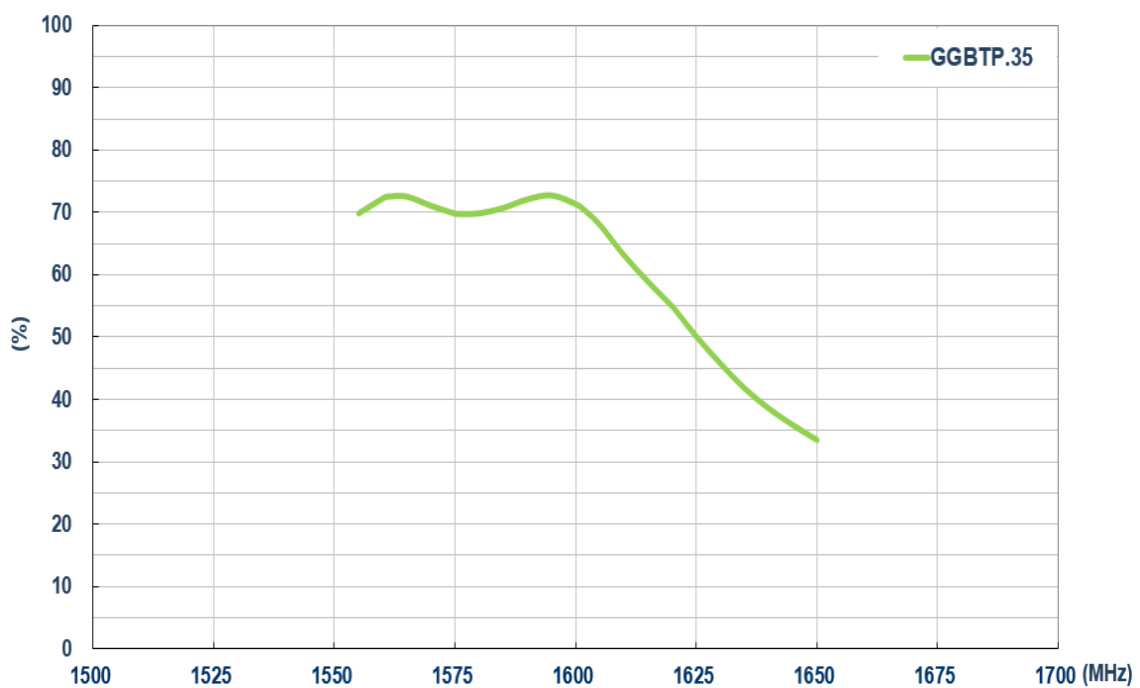

### 3.3 Average Gain

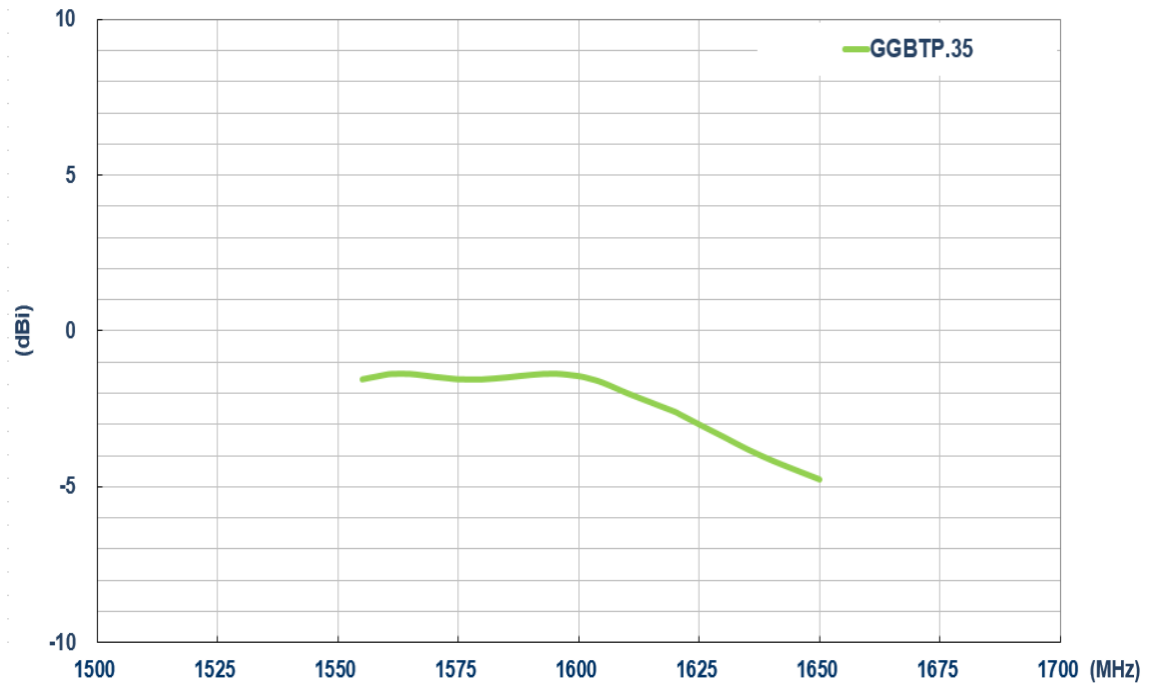


### 3.4 Peak Gain

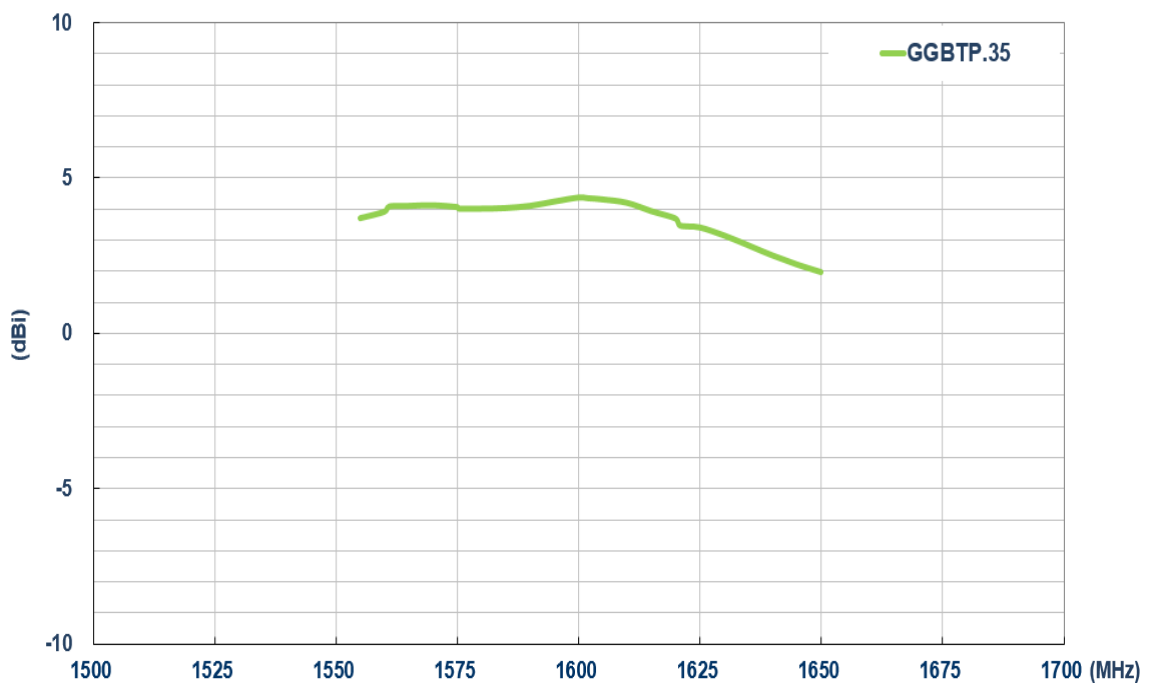

## 4. Radiation Patterns


### 4.1 Test Setup

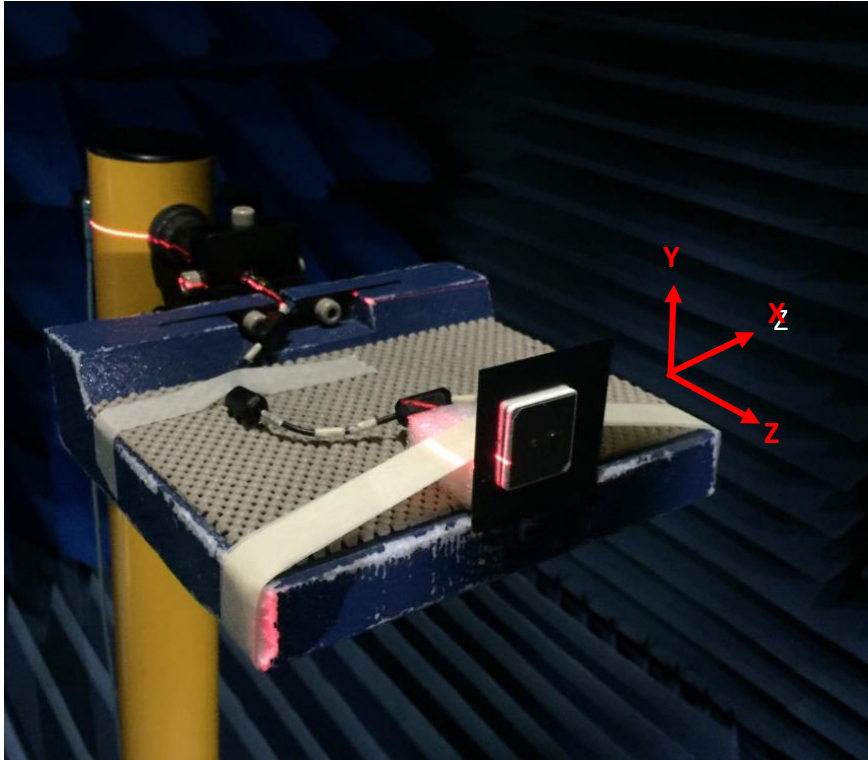


Tested on a 70\*70mm ground plane.

## 4.2 2D Radiation Patterns


### XY Plane

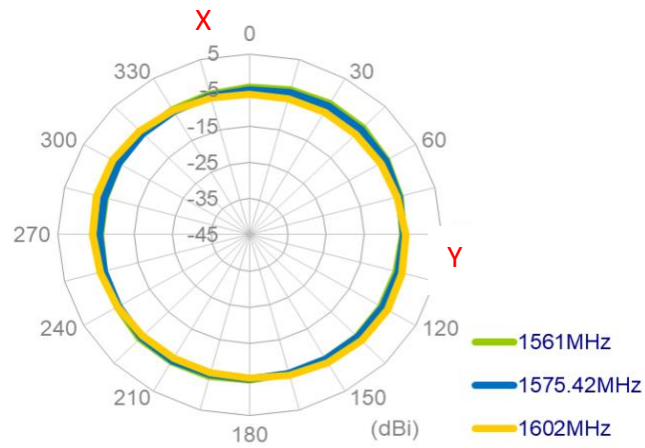

### XZ Plane



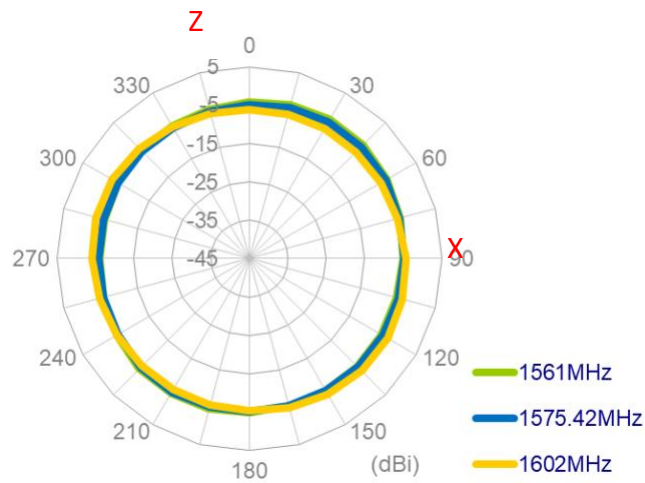


### YZ Plane

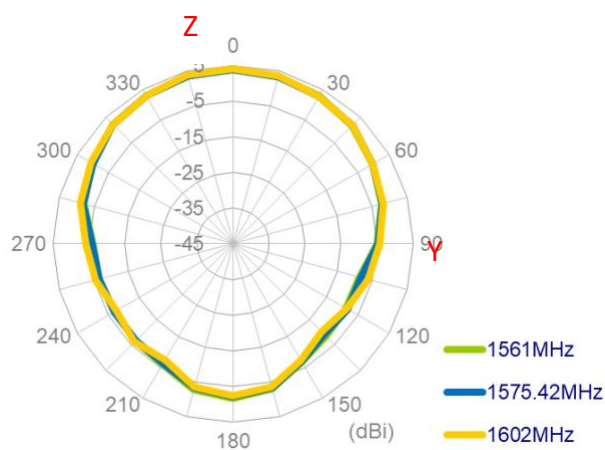




4.3 3D Radiation Patterns

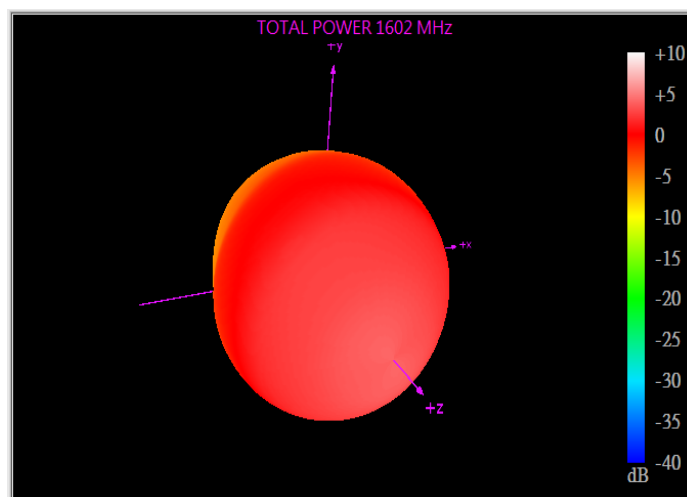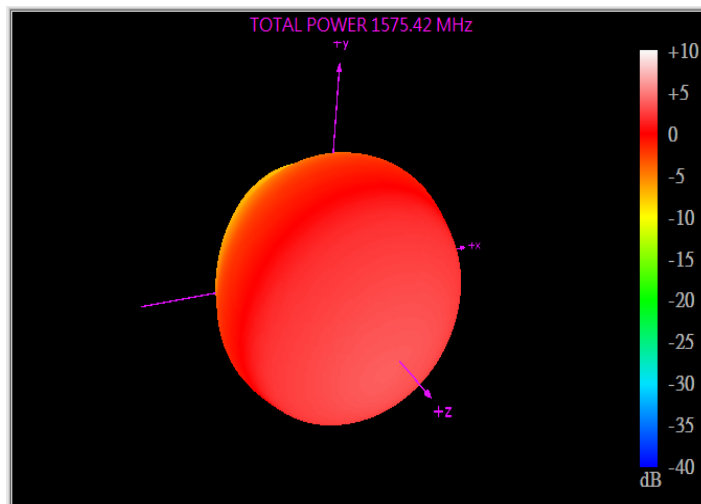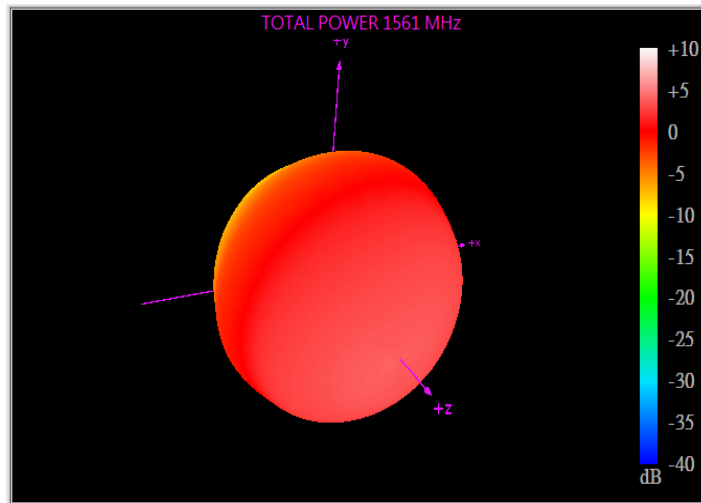

# 5. Mechanical Drawing (Units: mm)

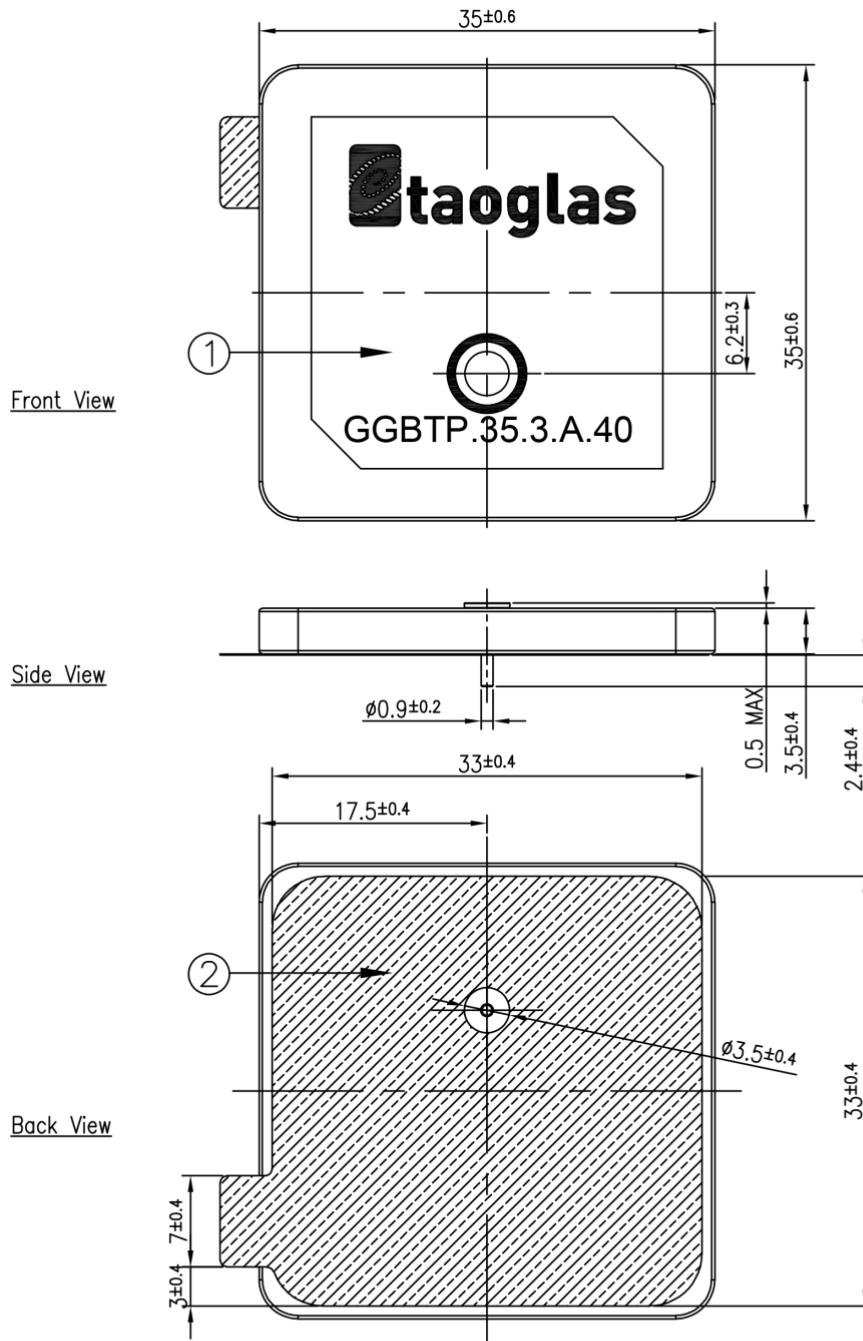


NOTES: 1. Double sided adhesive area. 2. Soldermask Area.

	Name	P/N	Material	Finish	QTY
1	GGBTP.35 Patch	001517C080000A	Terrablast	Clear	1
2	Double sided Adhesive	001517C080000A	NITTO 5015	White Linter	1

Download Drawing

Download 3D Model

## 6. Footprint

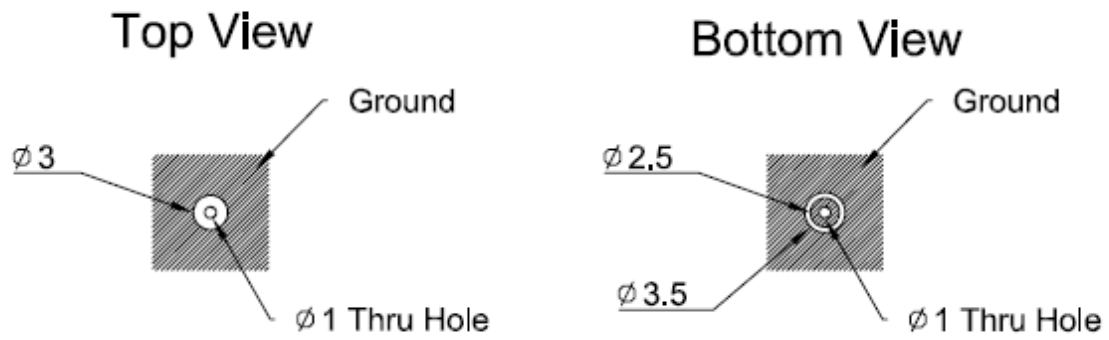


Tolerance: +/- 0,20  
Unit:mm

## 7. Soldering Method Recommendation

### 7.1 Manual Hand Soldering

Soldering Temperature: 360-380°C


Soldering Duration: 3~4 seconds

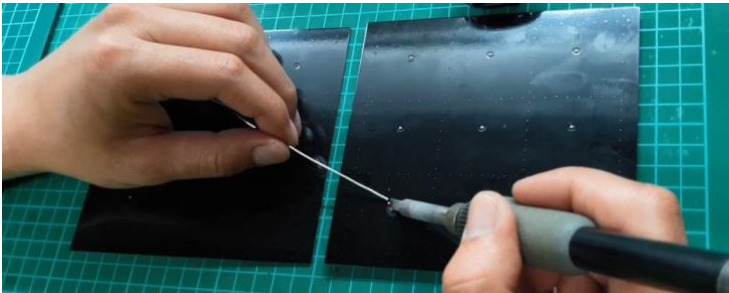

### 7.2 Automated Ferrochrome Soldering Machine

Soldering Temperature: 360-380°C


Soldering Duration: 3~4 seconds

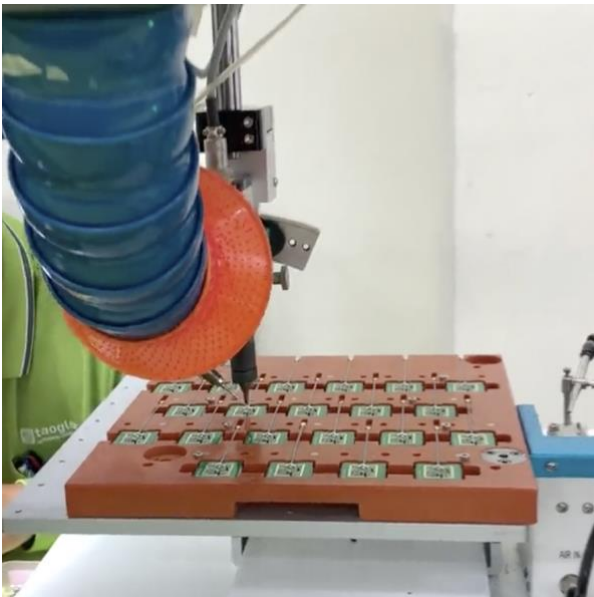


*Please note that this process will require a one-time fixture to be made for each PCB design, Example as per image above.*

## 8. Packaging


72 pcs GGBTP.35.3.A.40 per box  
 Box Dimensions - 261\*152\*118mm  
 Total Weight - 1.17kg

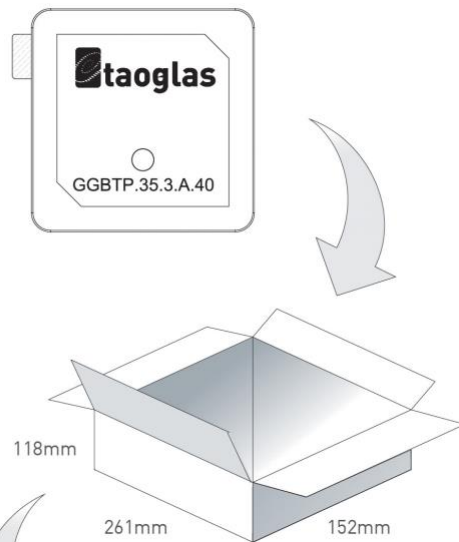

4 boxes / 288 pcs GTP.35.3.A.40 per carton  
 Carton Dimensions - 330\*280\*270  
 Weight - 4.94Kg

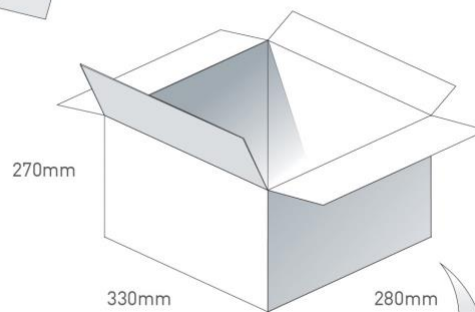

Pallet Dimensions 1200mm\*1000mm\*1480mm  
 48 Cartons per pallet  
 12 Cartons per layer  
 4 Layers

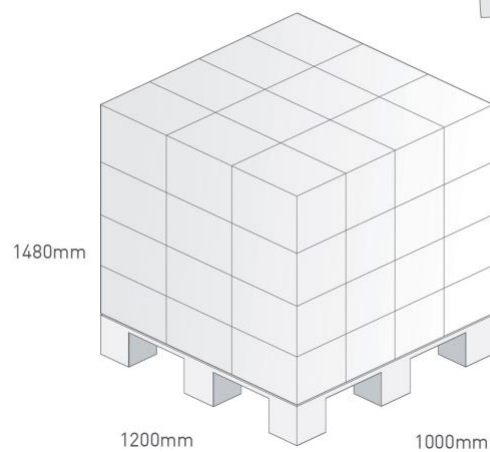

Changelog for the datasheet

**SPE-18-8-020 - GGBTP.35.3.A.40**

**Revision: D (Current Version)**

Date:	2021-06-12
Changes:	Updated Pin Length to 2.4mm Updated Drawing
Changes Made by:	Dan Cantwell

**Previous Revisions**

**Revision: C**

Date:	2021-01-19
Changes:	Updated Packaging
Changes Made by:	Jack Conroy

**Revision: B**

Date:	2020-12-09
Changes:	Amended soldering recommendations and updated datasheet to new format.
Changes Made by:	Gary West

**Revision: A (Original First Release)**

Date:	2018-01-17
Notes:	
Author:	WY



**TAOGLAS**®

[www.taoglas.com](http://www.taoglas.com)

