


# BR-2/3AG

## BR Cylindrical-type Lithium Battery




### Features & Benefits

- Long-term operating performance
- Suitable for Power supplies for products such as that demand long-term reliability

### Applications

Commercial equipment (communication/measurement devices), meters (gas, water, electricity, hot water), memory backup (large FA equipment), automotive electronic components (security alarms), etc.

#### Discharge temperature characteristics

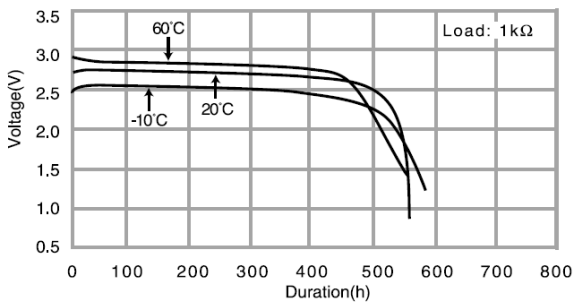

### Specifications

Nominal voltage	3V	
Nominal capacity	1,450mAh	
Continuous drain	2.5mA	
Dimensions*1	Diameter(Max.)	17.0mm
	Height(Max.)	33.5mm
Weight*1	Approx. 13.0g	
Operating temperature	-40°C ~ +85°C	

\*1 Without tabs.

### Terminal types

Please see the documents for the terminal and lead wire settings.

- [Line up of tab terminal types\(by shape\)](#)
- [Line up of tab terminal types\(by product number\)](#)

#### Operating voltage vs. Discharge current (voltage at 50% discharge depth)

