
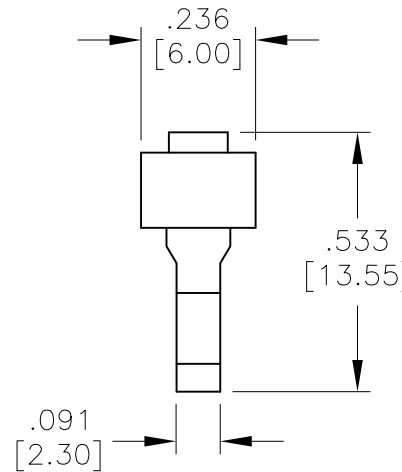


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/3/05	
A		REDRAWN	8/18/11	
B		REVISED DIM.	10/28/11	
C		REVISED DIM.	1/19/18	AY/RC1

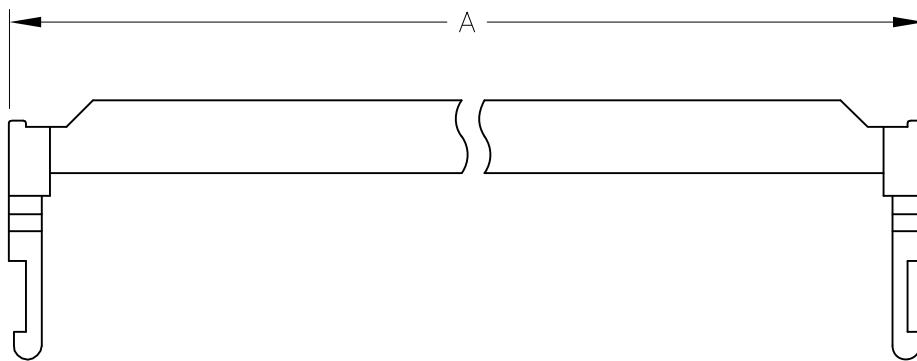

POSITIONS	A	
6	.485	12.32
8	.585	14.86
10	.685	17.40
12	.785	19.94
14	.885	22.48
16	.985	25.02
18	1.086	27.56
20	1.185	30.10
24	1.385	35.18
26	1.485	37.72
28	1.585	40.26
30	1.685	42.80
34	1.885	47.88
40	2.185	55.50
44	2.385	60.58
50	2.685	68.20
60	3.185	80.90
64	3.385	85.98

SPECIFICATIONS:
 Material:
 Insulator: PBT, glass filled thermoplastic, rated UL 94V-0
 Insulator color: Black
 Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLES
 .X ± .10 Ø.X ± .10
 .XX ± .020 Ø.XX ± .015
 .XXX ± .015 Ø.XXX ± .010

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

APPROVALS		DATE
DRAWN	SS	6/3/05
CHECKED		
APPROVED		

TITLE STRAIN RELIEF FOR FCS SERIES		
SIZE X	PART NO. FSR-XX	REV. C
REF: S00087T	SCALE: NTS	SHEET 1 OF 1