

---

# NI-9221

# Specifications

---

2022-10-07

# Contents



|                             |   |
|-----------------------------|---|
| NI-9221 Datasheet.....      | 3 |
| NI-9221 Specifications..... | 8 |

# NI-9221 Datasheet



- DSUB, screw terminal, or spring terminal connectivity
- 250 V RMS, CAT II, channel-to-earth isolation (screw and spring terminal); 60 V DC, CAT I, channel-to-earth isolation (DSUB)
- -40 °C to 70 °C operating range, 5 g vibration, 50 g shock

The NI-9221 is an analog input module for CompactDAQ and CompactRIO systems. The NI-9221 provides eight channels of  $\pm 60$  V input with 800 kS/s sample rate.

|   |                     |  |
|---|---------------------|--|
|  | <p>Kit Contents</p> | <ul style="list-style-type: none"> <li>• NI 9221</li> <li>• NI 9221 Getting Started Guide</li> </ul>   |
|  | <p>Accessories</p>  | <ul style="list-style-type: none"> <li>• NI 9927 Backshell Connector Kit (Screw Terminal)</li> <li>• NI 9981 Backshell Connector Kit (Spring Terminal)</li> <li>• NI 9924 Screw-Terminal Block (DSUB)</li> </ul> |

| C SERIES ANALOG INPUT MODULE COMPARISON |                            |                                  |             |              |            |                                       |
|---|----------------------------|----------------------------------|-------------|--------------|------------|---------------------------------------|
| Product Name                            | Signal Levels              | Channels                         | Sample Rate | Simultaneous | Resolution | Connectivity                          |
| NI 9201                                 | ±10 V                      | 8 Single-Ended                   | 500 kS/s    | No           | 12-Bit     | Screw-Terminal, Spring-Terminal, DSUB |
| NI 9205                                 | ±200 mV, ±1 V, ±5 V, ±10 V | 32 Single-Ended, 16 differential | 250 kS/s    | No           | 16-Bit     | Spring-Terminal, DSUB                 |
| NI 9206                                 | ±200 mV, ±1 V, ±5 V, ±10 V | 32 Single-Ended, 16 Differential | 250 kS/s    | No           | 16-Bit     | Spring-Terminal                       |
| NI 9207                                 | ±10 V, ±20 mA              | 8 Differential, 8 Current        | 500 S/s     | No           | 24-Bit     | Spring-Terminal, DSUB                 |
| NI 9209                                 | ±10 V                      | 32 Single-Ended, 16 Differential | 500 S/s     | No           | 24-Bit     | Spring-Terminal, DSUB                 |
| NI 9215                                 | ±10 V                      | 4 Differential                   | 100 kS/s/ch | Yes          | 16-Bit     | Screw-Terminal, Spring-Terminal, BNC  |
| NI 9220                                 | ±10 V                      | 16 Differential                  | 100 kS/s/ch | Yes          | 16-Bit     | Spring-Terminal, DSUB                 |
| NI 9221                                 | ±60 V                      | 8 Single-Ended                   | 800 kS/s    | No           | 12-Bit     | Screw-Terminal, Spring-Terminal, DSUB |
| NI 9222                                 | ±10 V                      | 4 Differential                   | 500 kS/s/ch | Yes          | 16-Bit     | Screw-Terminal, BNC                   |
| NI 9223                                 | ±10 V                      | 4 Differential                   | 1 MS/s/ch   | Yes          | 16-Bit     | Screw-Terminal, BNC                   |

## NI C Series Overview



NI provides more than 100 C Series modules for measurement, control, and communication applications. C Series modules can connect to any sensor or bus and allow for high-accuracy measurements that meet the demands of advanced data acquisition and control applications.

- Measurement-specific signal conditioning that connects to an array of sensors and signals
- Isolation options such as bank-to-bank, channel-to-channel, and channel-to-earth ground
- -40 °C to 70 °C temperature range to meet a variety of application and environmental needs
- Hot-swappable

The majority of C Series modules are supported in both CompactRIO and CompactDAQ platforms and you can move modules from one platform to the other with no modification.

## CompactRIO



CompactRIO combines an open-embedded architecture with small size, extreme ruggedness, and C Series modules in a platform powered by the NI LabVIEW reconfigurable I/O (RIO) architecture. Each system contains an FPGA for custom timing, triggering, and processing with a wide array of available modular I/O to meet any embedded application requirement.

## CompactDAQ

CompactDAQ is a portable, rugged data acquisition platform that integrates connectivity, data acquisition, and signal conditioning into modular I/O for directly interfacing to any sensor or signal. Using CompactDAQ with LabVIEW, you can easily customize how you acquire, analyze, visualize, and manage your measurement data.




## Software

### LabVIEW Professional Development System for Windows




- Use advanced software tools for large project development
- Generate code automatically using DAQ Assistant and Instrument I/O Assistant
- Use advanced measurement analysis and digital signal processing
- Take advantage of open connectivity with DLLs, ActiveX, and .NET objects
- Build DLLs, executables, and MSI installers

### NI LabVIEW FPGA Module




- Design FPGA applications for NI RIO hardware
- Program with the same graphical environment used for desktop and real-time applications
- Execute control algorithms with loop rates up to 300 MHz
- Implement custom timing and triggering logic, digital protocols, and DSP algorithms
- Incorporate existing HDL code and third-party IP including Xilinx IP generator functions
- Purchase as part of the LabVIEW Embedded Control and Monitoring Suite

## NI LabVIEW Real-Time Module

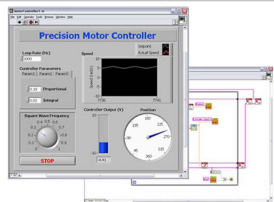

- Design deterministic real-time applications with LabVIEW graphical programming
- Download to dedicated NI or third-party hardware for reliable execution and a wide selection of I/O
- Take advantage of built-in PID control, signal processing, and analysis functions
- Automatically take advantage of multicore CPUs or set processor affinity manually
- Take advantage of real-time OS, development and debugging support, and board support
- Purchase individually or as part of a LabVIEW suite

## NI-9221 Block Diagram

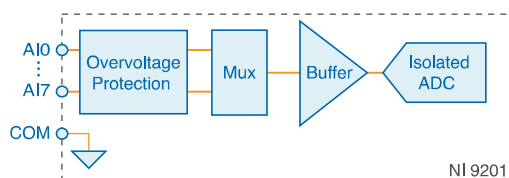

- Input signals are scanned, buffered, conditioned, and then sampled by a single ADC.
- Each AI channel provides an independent signal path and ADC, enabling you to sample all channels simultaneously.

# NI-9221 Specifications

The following specifications are typical for the range -40 °C to 70 °C unless otherwise noted. All voltages are relative to COM unless otherwise noted.

**Caution** Do not operate the NI-9221 in a manner not specified in this document. Product misuse can result in a hazard. You can compromise the safety protection built into the product if the product is damaged in any way. If the product is damaged, return it to NI for repair.

## Input Characteristics

|  |   |
|--|---|
| Number of channels                             | 8                                       |
| ADC resolution                                 | 12 bits                                 |
| Type of ADC                                    | Successive approximation register (SAR) |
| <b>Maximum Sample Rate (Aggregate)</b>         |   |
| R Series Expansion Chassis                     | 475 kS/s                                |
| All Other Chassis                              | 800 kS/s                                |
| Input range                                    | ±60 V                                   |
| <b>Measurement voltage, channel-to-COM (V)</b> |   |
| Minimum  | ±61.4                                   |
| Typical  | ±62.50                                  |



| Maximum                                | ±63.8                     |                                 |  |
|--|---------------------------|---------------------------------|--|
| Overvoltage protection, channel-to-COM | ±100 V                    |                                 |  |
| Measurement Conditions                 |                           | Percent of Reading (Gain Error) | Percent of Range <sup>[1]</sup> (Offset Error) |
| Calibrated                             | Typical (25 °C, ±5 °C)    | ±0.04%                          | ±0.07%   |
|  | Maximum (-40 °C to 70 °C) | ±0.25%                          | ±0.25%   |
| Uncalibrated <sup>[2]</sup>            | Typical (25 °C, ±5 °C)    | ±0.26%                          | ±0.43%   |
|  | Maximum (-40 °C to 70 °C) | ±0.67%                          | ±1.06%   |

Table 1. NI-9221 Accuracy (Excludes Noise)

|                                   |             |
|-----------------------------------|-------------|
| <b>Stability</b>                  |             |
| Gain drift                        | ±34 ppm/°C  |
| Offset drift                      | ±580 µV/°C  |
| Input bandwidth (-3 dB)           | 950 kHz min |
| <b>Input impedance</b>            |             |
| Resistance                        | 1 MΩ        |
| Capacitance                       | 5 pF        |
| <b>Input noise, code-centered</b> |             |
| RMS                               | 0.7 LSBrms  |
| Peak-to-peak                      | 5 LSB       |
| No missing codes                  | 12 bits     |

|                         |  |
|-------------------------|--|
| DNL                     | -0.9 to 1.5 LSB  |
| INL                     | $\pm 1.5$ LSB  |
| Crosstalk, at 10 kHz    | -75 dB   |
| Settling time, to 1 LSB | 1.25 $\mu$ s   |
| MTBF                    | 1,092,512 hours at 25 °C; Bellcore Issue 2, Method 1, Case 3, Limited Part Stress Method |

## Power Requirements

|                                       |               |
|---------------------------------------|---------------|
| <b>Power consumption from chassis</b> |               |
| Active mode                           | 1 W maximum   |
| Sleep mode                            | 1 mW maximum  |
| <b>Thermal dissipation (at 70 °C)</b> |               |
| Active mode                           | 1 W maximum   |
| Sleep mode                            | 32 mW maximum |

## Physical Characteristics

|                               |   |
|-------------------------------|---|
| <b>Spring-terminal wiring</b> |   |
| Gauge                         | 0.2 mm <sup>2</sup> to 2.5 mm <sup>2</sup> (30 AWG to 12 AWG) copper conductor wire |
| Wire strip length             | 10 mm (0.39 in.) of insulation stripped from the end                                |

|                              |  |                |
|------------------------------|--|----------------|
| Temperature rating           | 90 °C, minimum   |                |
| Wires per spring terminal    | One wire per spring terminal; two wires per spring terminal using a 2-wire ferrule |                |
| <b>Connector securement</b>  |  |                |
| Securement type              | Screw flanges provided   |                |
| Torque for screw flanges     | 0.2 N · m (1.80 lb · in.)  |                |
| <b>Weight</b>                |  |                |
| NI-9221 with screw terminal  |  | 165 g (5.8 oz) |
| NI-9221 with spring terminal |  | 152 g (5.4 oz) |
| NI-9221 with DSUB            |  | 142 g (5.0 oz) |

## NI-9221 with Screw Terminal and NI-9221 with Spring Terminal Safety Voltages

Connect only voltages that are within the following limits.

|                                |  |
|--------------------------------|--|
| Channel-to-COM                 | ±60 V DC maximum   |
| Channel-to-channel             | None   |
| <b>Channel-to-earth ground</b> |  |
| Continuous                     | 250 V RMS, Measurement Category II                       |
| Withstand                      | 2,300 V RMS, verified by a 5 s dielectric withstand test |

## NI-9221 with DSUB Safety Voltages

Connect only voltages that are within the following limits.

|                         |  |
|-------------------------|--|
| Channel-to-COM          | ±60 V DC maximum   |
| Channel-to-channel      | None   |
| <b>Channel-to-earth</b> |  |
| Continuous              | 60 V DC, Measurement Category I                          |
| Withstand               | 1,000 V RMS, verified by a 5 s dielectric withstand test |

## Hazardous Locations

|   |   |
|---|---|
| U.S. (UL)                               | Class I, Division 2, Groups A, B, C, D, T4; Class I, Zone 2, AEx nA IIC T4 Gc |
| Canada (C-UL)                           | Class I, Division 2, Groups A, B, C, D, T4; Class I, Zone 2, Ex nA IIC T4 Gc  |
| Europe (ATEX) and International (IECEx) | Ex nA IIC T4 Gc   |

## Safety and Hazardous Locations Standards

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA 61010-1
- EN 60079-0:2012, EN 60079-15:2010

- IEC 60079-0: Ed 6, IEC 60079-15; Ed 4
- UL 60079-0; Ed 5, UL 60079-15; Ed 3
- CSA 60079-0:2011, CSA 60079-15:2012

**Note** For UL and other safety certifications, refer to the product label or the [Online Product Certification](#) section.

## Electromagnetic Compatibility

- EN 61326 (IEC 61326): Class A emissions; Industrial immunity

**Note** For EMC compliance, operate this device with double-shielded cables.

## CE Compliance

This product meets the essential requirements of applicable European Directives, as follows:

- 2014/35/EU; Low-Voltage Directive (safety)
- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)
- 94/9/EC; Potentially Explosive Atmospheres (ATEX)

## Product Certifications and Declarations

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for NI products, visit [ni.com/product-certifications](http://ni.com/product-certifications), search by model number, and click the appropriate link.

## Shock and Vibration

To meet these specifications, you must panel mount the system.

|                            |  |
|----------------------------|--|
| <b>Operating vibration</b> |  |
| Random                     | 5 g RMS, 10 Hz to 500 Hz   |
| Sinusoidal                 | 5 g, 10 Hz to 500 Hz   |
| Operating shock            | 30 g, 11 ms half sine; 50 g, 3 ms half sine; 18 shocks at 6 orientations |

## Environmental

Refer to the manual for the chassis you are using for more information about meeting these specifications.

|  |                                 |
|--|---------------------------------|
| Operating temperature (IEC 60068-2-1, IEC 60068-2-2) | -40 °C to 70 °C                 |
| Storage temperature (IEC 60068-2-1, IEC 60068-2-2)   | -40 °C to 85 °C                 |
| Ingress protection                                   | IP40                            |
| Operating humidity (IEC 60068-2-78)                  | 10% RH to 90% RH, noncondensing |
| Storage humidity (IEC 60068-2-78)                    | 5% RH to 95% RH, noncondensing  |
| Pollution Degree                                     | 2                               |
| Maximum altitude                                     | 2,000 m                         |


Indoor use only.

## Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the **Engineering a Healthy Planet** web page at [ni.com/environment](http://ni.com/environment). This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

## EU and UK Customers

-  **Waste Electrical and Electronic Equipment (WEEE)**—At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region, visit [ni.com/environment/weee](http://ni.com/environment/weee).

## 电子信息产品污染控制管理办法（中国 RoHS）

-  **中国 RoHS**—NI 符合中国电子信息产品中限制使用某些有害物质指令(RoHS)。关于 NI 中国 RoHS 合规性信息，请登录 [ni.com/environment/rohs\\_china](http://ni.com/environment/rohs_china)。(For information about China RoHS compliance, go to [ni.com/environment/rohs\\_china](http://ni.com/environment/rohs_china).)

## Calibration

You can obtain the calibration certificate and information about calibration services for the NI-9221 at [ni.com/calibration](http://ni.com/calibration).

|                      |        |
|----------------------|--------|
| Calibration interval | 1 year |
|----------------------|--------|

<sup>1</sup> Range equals 62.50 V

<sup>2</sup> Uncalibrated accuracy refers to the accuracy achieved when acquiring in raw or unscaled modes where the calibration constants stored in the module are not applied to the data.