


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
	H	REV PER ECO 14-014240		10-1-14	CT	CD	

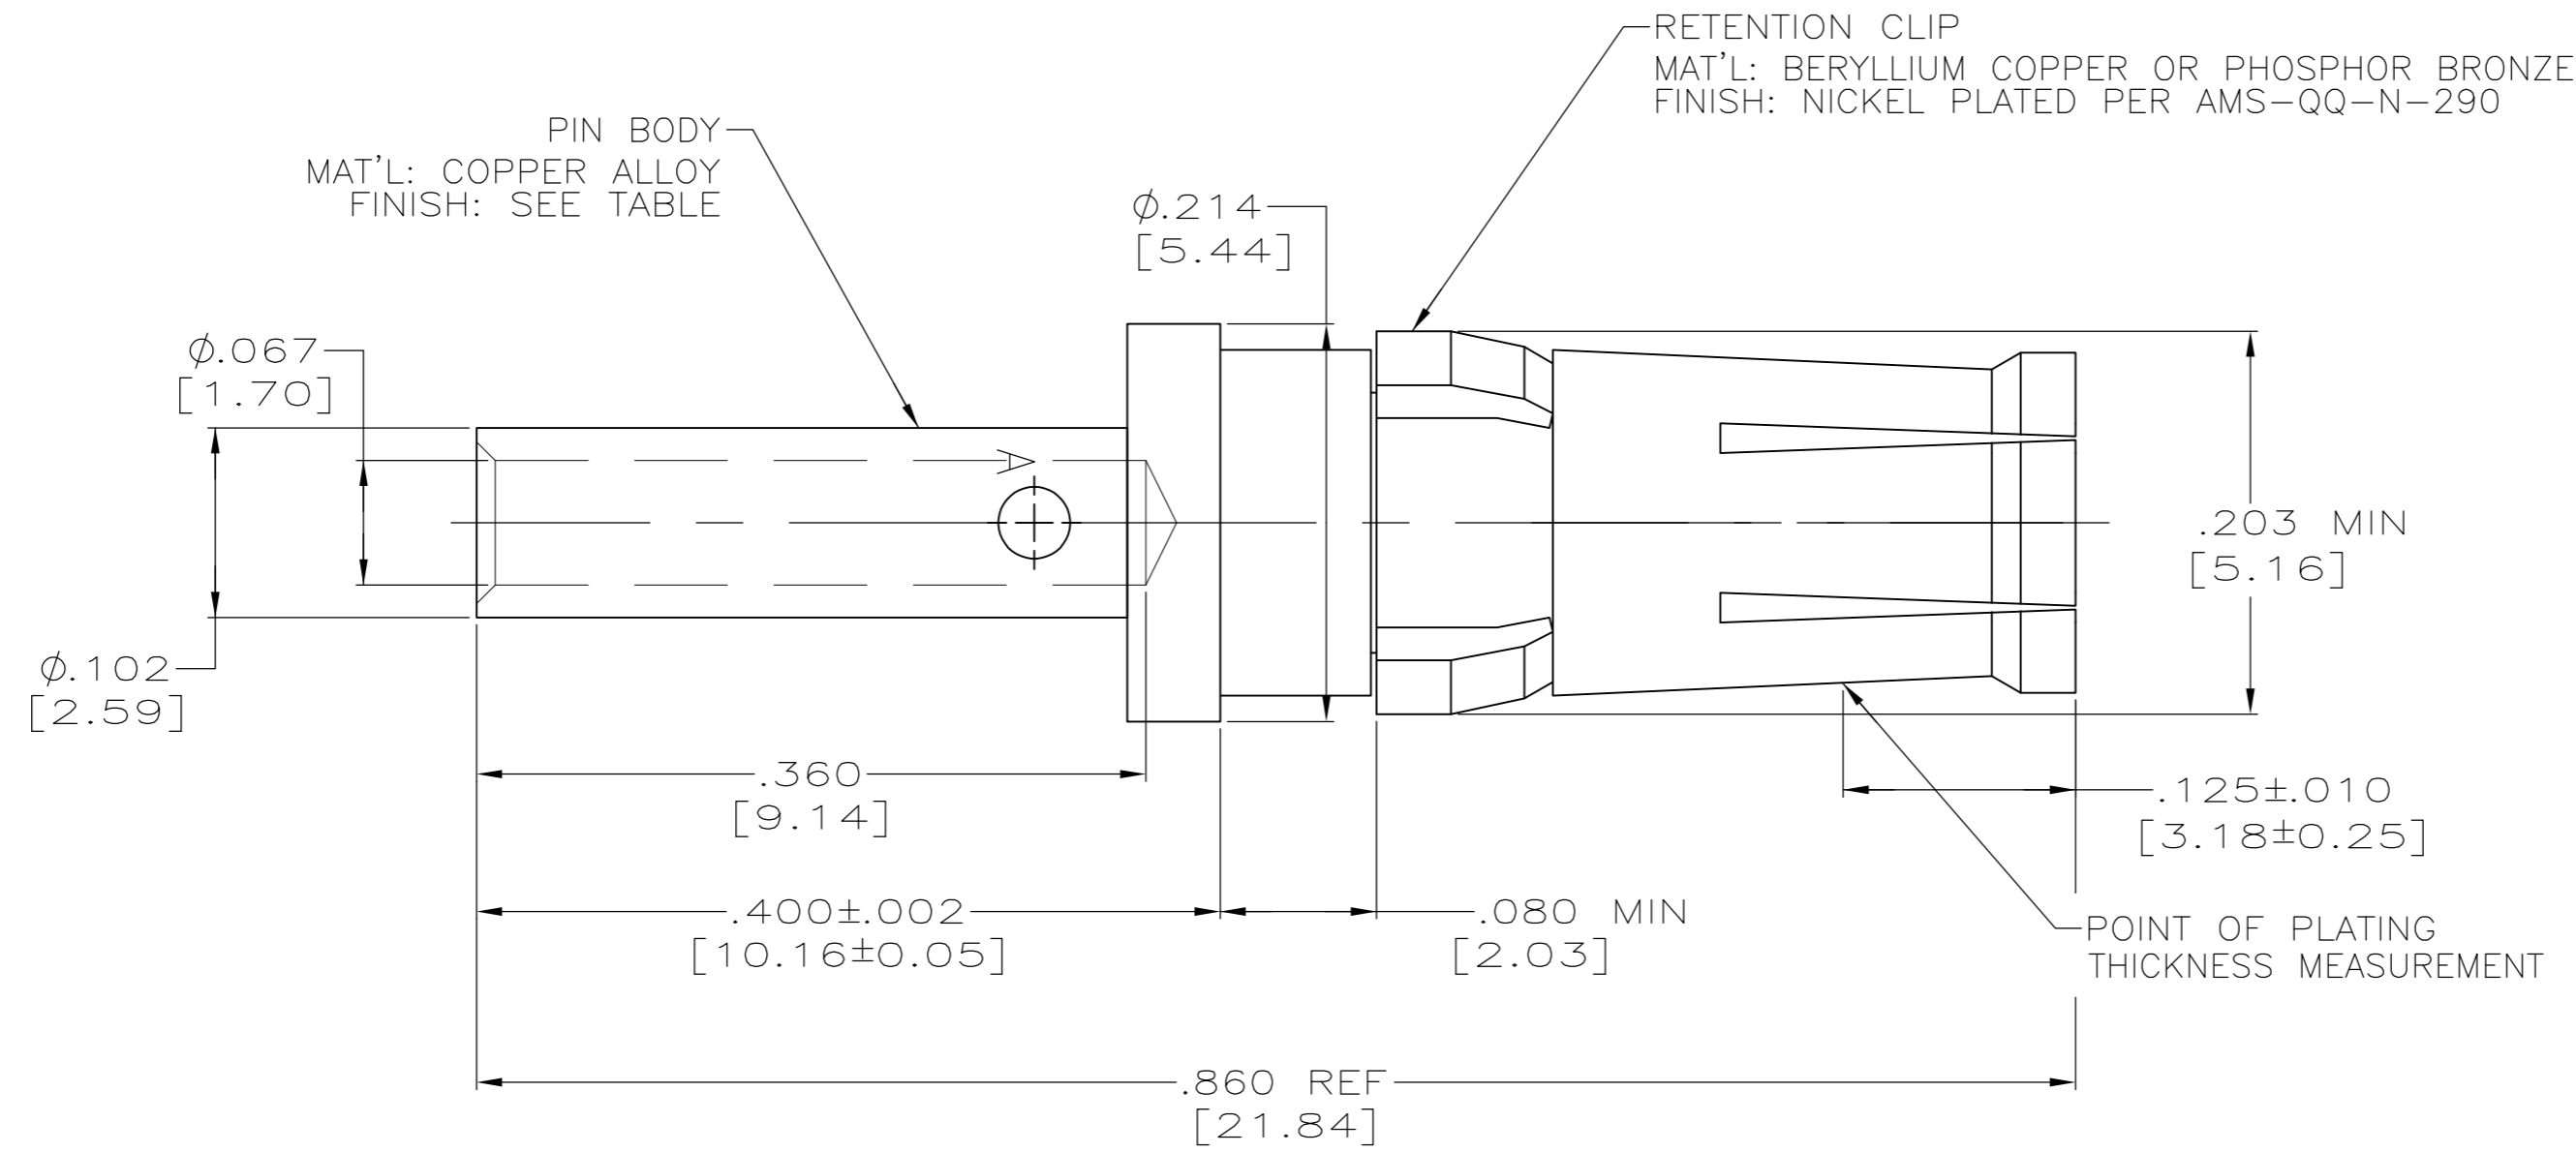

PIN BODY
 MAT'L: COPPER ALLOY
 FINISH: SEE TABLE

RETENTION CLIP
 MAT'L: BERYLLIUM COPPER OR PHOSPHOR BRONZE
 FINISH: NICKEL PLATED PER AMS-QQ-N-290

- THIS PART CONFORMS TO REQUIREMENTS FOR DANIELS CRIMP TOOL NO. FT8, WITH DANIELS POSITIONER PART NO. TP731, STRIP LENGTH .375, #16 AWG SETTING 8, #18 AWG SETTING 6.
- MATES WITH 212013-1 IN AMPLIMITE CONNECTOR ASSEMBLIES ONLY.
- FINISH: PLATED GOLD .000050 [0.00127] MIN THK PER ATSM-B-488 OVER NICKEL .000050 [0.00127] MIN THK PER AMS-QQ-N-290.
- FINISH: PLATED GOLD .000030 [0.00076] MIN THK PER ATSM-B-488 OVER NICKEL .000050 [0.00127] MIN THK PER AMS-QQ-N-290.
- WIRE BARREL WILL ACCEPT #16-#18 AWG WIRE.
- PART NUMBER IS RESTRICTED.

PRELIMINARY NOT RELEASED FOR PRODUCTION	6	1-212014-1
	4	212014-2
	3	212014-1
	FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	C.C.THOMAS	11/10/00	TE TE Connectivity		
DIMENSIONS: INCHES [mm]		CHK	D.MILLER	11/10/00			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	D.MILLER	11/10/00	NAME		
0 PLC ± -		PRODUCT SPEC		ASSEMBLY, SOCKET CONTACT			
1 PLC ± -		APPLICATION SPEC		POWER VIII, #16 & #18 AWG			
2 PLC ± -		108-10045		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
3 PLC ± .005 [0.13]		114-10014		A2	00779	C=212014	-
4 PLC ± -		WEIGHT		SCALE 10:1 SHEET 1 of 1 REV H			
ANGLES ± -		FINISH		CUSTOMER DRAWING			
SEE CALLOUTS		SEE TABLE					